FLUSH MOUNT FIXTURE
INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Screw the #8-32 IPS FIXTURE SCREWS (4) onto the MOUNTING BRACKET (2), and thread the #8-32 HEX NUTS (13) onto the #8-32 FIXTURE SCREWS (4). Do not tighten the #8-32 IPS HEX NUTS (13) at this time.

2. Pull the SUPPLY WIRES (5 & 6) and the SUPPLY GROUND WIRE (7) out from the OUTLET BOX (1) and attach the MOUNTING BRACKET (2) to the OUTLET BOX (1) using the slotted holes on the MOUNTING BRACKET (2) and the #8-32 IPS MOUNTING SCREWS (3) provided.

3. Place the COVER PLATE (11) over the OUTLET BOX (1) and onto the #8-32 IPS FIXTURE SCREWS (4) and adjust the #8-32 IPS FIXTURE SCREWS (4) until they protrude out from the COVER PLATE (11) 1/4". Remove the COVER PLATE (11) and secure the position of the #8-32 IPS FIXTURE SCREWS (4) by tightening the #8-32 IPS HEX NUTS (13) against the MOUNTING BRACKET (2).

4. Attach the BLACK SUPPLY WIRE (6) to the BLACK FIXTURE WIRE (9) by using the WIRE CONNECTOR (16). In the same manner, attach the WHITE SUPPLY WIRE (5) to the WHITE FIXTURE WIRE (8). Connect the FIXTURE GROUND WIRE (10) to the SUPPLY GROUND WIRE (7) using a WIRE CONNECTOR (16)(not included) .

ASSEMBLY AND INSTALLATION (Continued)

5. Carefully tuck all wiring back into the OUTLET BOX (1). Place the COVER PLATE (11) back onto the #8-32 IPS FIXTURE SCREWS (4) and secure the COVER PLATE (11) into place using the DECORATIVE NUTS (12) provided.

6. Install the bulbs. (See markings and/or labels on the fixture for maximum wattage — DO NOT OVER LAMP.).

7. Place the GLASS SHADE (14) over the COVER PLATE (11) onto the THREADED PIPE (17). Secure the GLASS SHADE (14) and CAP (18) in place by threading the FINIAL (15) onto the THREADED PIPE (17).

INSTALLATION IS NOW COMPLETED

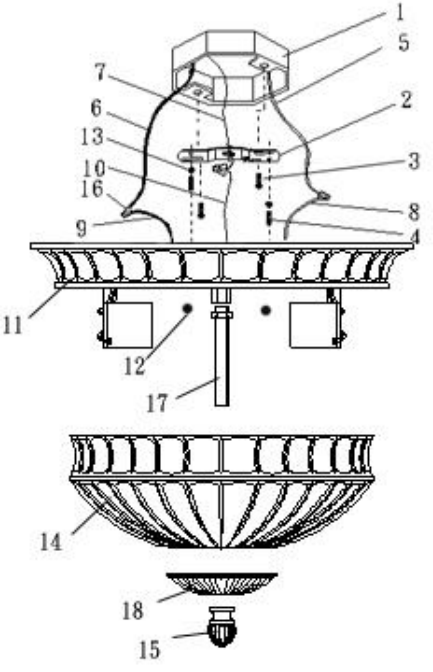

1. OUTLET BOX
2. MOUNTING BRACKET
3. #8-32 IPS MOUNTING SCREW
4. #8-32 IPS FIXTURE SCREW
5. WHITE SUPPLY WIRE
6. BLACK SUPPLY WIRE
7. SUPPLY GROUND WIRE
8. WHITE FIXTURE WIRE
9. BLACK FIXTURE WIRE
10. FIXTURE GROUND WIRE
11. COVER PLATE
12. DECORATIVE NUT
13. #8-32 IPS HEX NUT
14. GLASS SHADE
15. FINIAL
16. WIRE CONNECTOR
17. THREADED PIPE
18. CAP